

Improvement Of Magazine Production Quality Using Six Sigma Method : Case Study Of a PT.XYZ

by Hernadewita Hernadewita

Submission date: 14-Mar-2019 10:06AM (UTC+0700)

Submission ID: 1093012530

File name: uction_Quality_Using_Six_Sigma_Method_Case_Study_Of_a_PT.XYZ.pdf (531.32K)

Word count: 3779

Character count: 20146

Improvement Of Magazine Production Quality Using Six Sigma Method : Case Study at Printing Industry

Hernadewita¹, Mahefud Ismail², Mohamad Nurdin³, Lien Herliani Kusumah⁴

1Department of Industrial Engineering, Mercu Buana University, Indonesia (hadeita@yahoo.com)

2Department of Industrial Engineering, Mercu Buana University, Indonesia (mahefud_79@yahoo.com)

3Department of Industrial Engineering, Mercu Buana University, Indonesia (nurdin_stmi@yahoo.com)

4Department of Industrial Engineering, Mercu Buana University, Indonesia (lien.herliani@mercubuana.ac.id)

PAPER INFO	ABSTRACT
<p>Chronicle: Received: Received: Accepted: Available :</p> <p>Keywords : Quality Control ; Six Sigma Pareto ; Diagrams ; Cause and Effect Diagrams</p>	<p>Quality control is an important thing that must be done by the company to minimize defective products. The company can analyze product defects by using the six sigma method, by formulating Define, Measure, Analyze, Improve, Control (DMAIC) that occurs. PT. XYZ as a large company that prints magazines often faces the problem of quality defects in its printouts, resulting in cost losses due to production defects every year is not small, as a result of not being sold. The Six Sigma method is an approach method to help control the quality of production. This study was conducted to determine the level of sigma from the current production process, the types of defects that are a priority to be addressed, and the causes of disability. From the results of the study, the sigma value of current production is 3.6 or DPMO of 15919.63613. The type of defect that occurs is blurred by 59%, does not register at 29% and paper cut by 12%. To achieve six sigma it is necessary to take corrective steps using the results of the analysis.</p>

1. Introduction

The production process is said to be good if the process produces a product that meets established standards [1]. However, in reality the various production processes still occur [2]. deviations and obstacles that result in the product being deemed defective. This also happens to PT. XYZ. Therefore quality control is very necessary so that the company can correct the occurrence of errors or irregularities in its production [3]. After this correction, the company is expected to be able to minimize the good losses seen in terms of quantity, quality, or time. One way to improve and improve quality in a company is the six sigma method [4]. The Six Sigma method is a method or way to achieve operating performance in only 3.4 defects for every one million activities or opportunities [5]. Six sigma is uniquely controlled by a strong understanding of facts, data, and statistical analysis, as well as careful attention to managing, improving, and reinvesting business [6]. Six sigma also provides proven benefits that include cost reduction, increased productivity, growth in market share, defect reduction, and development of production or service [7]. In its application, six sigma has 5 (five) steps to improve business performance namely define, measure, analyze, improve, and control so that problems or opportunities, processes, and customer requirements must be verified and updated on each step [8]. From the existence of six sigma, it is expected that the company can reduce the

defects produced in significant amounts so that the company is able to increase its market position in the face of competition in the food or convection business [9]. Based on the description above, this study will examine how to apply the six sigma method for quality control at PT. XYZ.

2. Literature Review

2.1 Definition

Control is an activity carried out to ensure that production and operation activities are carried out in accordance with what has been planned so that if there is a deviation, the deviation can be corrected and expectations determined can be achieved [10]. Activities control is carried out by monitoring output, comparing with standards, interpreting and taking action to readjust the processes so that they are in accordance with the standards [11]. Whereas quality according to Assauri (1999) is the invoices contained in an item or the results that cause the goods or results are in accordance with the purpose for what goods or results are needed [12]. So quality control is a tool for management to maintain, improve, and maintain quality by reducing the number of damaged products so as to benefit and satisfy customer desires [13]. Six sigma is a statistical concept that measures a process related to disability at level six sigma which is only 3.4 defects of a million opportunities [14]. Six sigma is also a management philosophy that focuses on removing defects by emphasizing understanding, measurement and process improvement [15]. In Six Sigma there is a cycle of 5 (five) DMAIC phases (Define, Measure, Analyze, Improve, Control), namely the continuous improvement process towards the six sigma target. DMAIC is done systematically based on knowledge and facts. DMAIC is a closed-loop process that eliminates unproductive process steps, often focusing on new measurements and applying technology to quality improvement towards six sigma targets [16]. Six sigma is a new method or technique in terms of controlling and improving products where the system is very comprehensive and flexible to achieve, maintain, and To support what must be done, use which method is needed by the needs and data and data needed [17].

2.2 Stages of Quality Control Using Six Sigma Method

In the application of quality control using the six sigma method, there are 5 (five) stages that must be passed, namely define, measure, analyze, improve, control [18]. Define Phase: Determining what processes will be evaluated is determined at this stage. The process consideration that will be evaluated is the process stage that significantly affects the profit creation for the company. However, in the process, there were many product failures and defects that would affect the next process stage [19]. Measure Phase: What is done at this stage is as follows: a. Determine quality characteristics: Critical to Quality (CTQ) that is directly related to the specific needs of the customer. b. Plan data collection at the process level, data collected and needed is data that is used to measure baseline performance and capability process at the process level and output. c. Calculate the capability of the process, which is measuring the data that is sampled according to the type of data to be converted to the sigma value. Analyze Phase: Things that must be considered are as follows: a. Detecting the main variables that affect disability in order to help facilitate efforts to reduce the level of disability. b. Quality cost conversion. c. Converting the number of failures into cost of poor quality in line with the

increase in sigma capabilities. Control Phase: Monitor all improvements to actions or activities to remain stable and in accordance with the specifications desired by the customer [20].

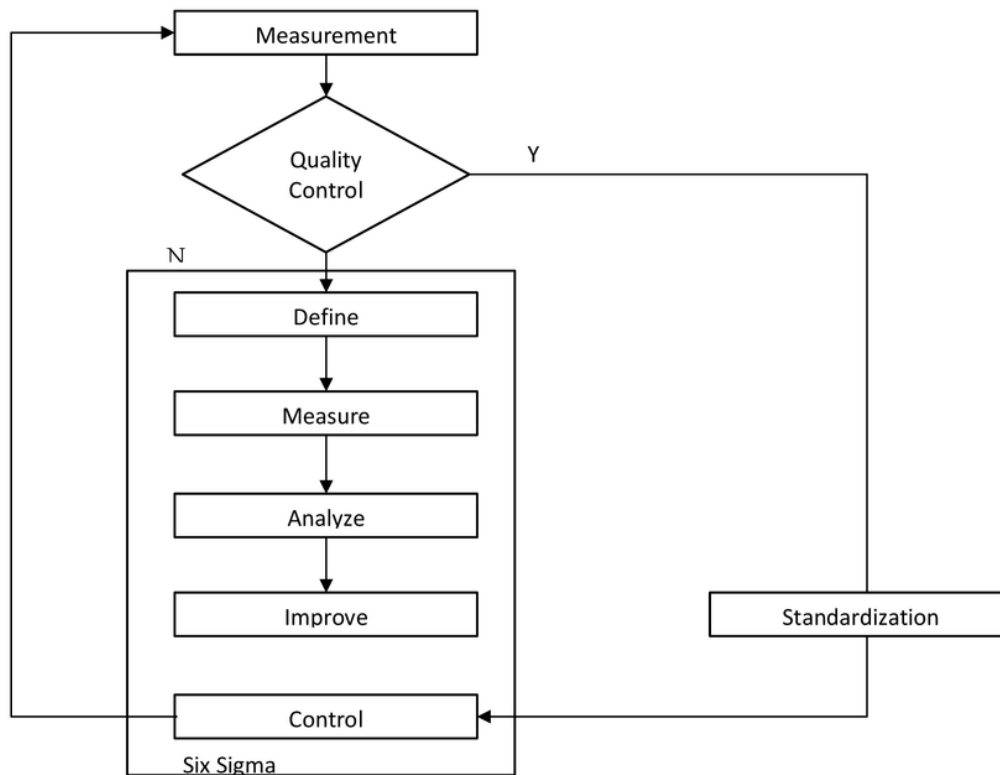


Fig.1 steps in the six sigma method

16

2.3 Benefits of Six Sigma

There are several **benefits of six sigma** for companies [21], namely: a. Produce sustainable success The way to continue growth and remain in control of the growth of a safe market is to continually innovate and re-create the organization [21]. Six sigma creates expertise and culture to constantly rise again. b. Set performance goals for everyone In a company, make everyone work in the same direction and focus on common goals [22]. Each function, business unit, and individuals have different goals and targets. Even so, there are things that everyone has inside or outside of change. Six sigma uses this to create a consistent goal. c. Strengthening value for customers With intense competition in every industry, only the delivery of quality or defect-free products and services does not guarantee success. Focusing on customers at the six sigma core means learning what values mean to customers and planning how to deliver them to them profitably [23]. d. Speed up the level improvements With

information technology that determines the pace of steps, customer expectations for improvement are increasingly evident. Companies that make the fastest improvements are likely to win the competition. By borrowing tools and ideas from many disciplines, Six Sigma helps a company not only improve performance but also improve improvements [24]. e. Promote learning and "Cross-pollination" Six sigma is a approaches that can improve and accelerate the development and dissemination of new ideas in an entire organization [25]. People who are trained with expertise in many processes and how to manage and improve processes can be transferred to other divisions with the ability to implement processes more quickly. Their ideas can be shared so that performance is easier to compare. f. Do change strategies Introducing new products, launching new partnerships, and entering new markets are daily business activities that are usually done by companies. By better understanding the processes and procedures the company will provide greater ability to make small adjustments or major changes demanded by business success.

3. Methodology

The research is a descriptive study that begins with a field study of the actual conditions that occur. The data used in this study are primary data from observations and interviews with parties in the field and secondary data from company documents, which are then processed again for the benefit of this research. The number of samples in this study is 100 with the sampling technique is random sampling using random number tables. This study will determine the value of DPMO and level Six companies. Diagram pareto is also made to find out the most dominant types of defects. The next step is to find out the causes of deviation in quality with fishbone diagrams. Overall this study follows the steps of Six Sigma which includes define, measure, analyze, improve, and control (DMAIC).

Six Sigma Method : Six Sigma is a vision of quality improvement towards the target of 3.4 failure per million opportunities (DPMO) for each product transaction (goods and services). Therefore, Six Sigma can be said as an effort made towards perfection (zero defect), the stages of implementing quality improvement with Six Sigma consist of five steps, namely using the DMAIC or Define, Measure, Analyze, Improve, and Control methods.

a. Define (Formulation), is the goal setting of six sigma quality improvement activities which is the first operational step in the Six Sigma quality improvement program.

b. Measure, is the second step in the Six Sigma-DMAIC quality improvement program. The main things to do in this case are:

1) Determine key quality characteristics, here are quality characteristics or CTQ. 2) Measurement of performance baselines of quality characteristic attributes at the output level. Before a product can be declared defective or failed, the criteria for failure or disability must be defined first.

$$DPMO = \frac{\text{Total production defects} \times 1,000,000}{\text{Also produce} \times CTO} \quad \text{Equation (1)}$$

Meanwhile, to get the sigma level value, it can be obtained from the DPMO conversion table to Sigma values or use functions in Microsoft Excel

$$= \text{normsinv} ((1,000,000 - PMO) / 1,000,000) + 1,5 \quad \text{Equation (2)}$$

c. Analyze (Analysis) is an examination of processes, facts, and data to get an understanding of why a problem occurs and where there is an opportunity to make improvements.

d. Improve is an action plan to improve the quality of Six Sigma after the root cause has been identified.

e. Control (control), is the last operational stage in Six Sigma projects. At this stage the results of quality improvement are documented and disseminated.

Pareto diagram : Pareto diagram diagram that describes the comparison of each type of data to the whole. By using the Pareto diagram, which problem can be seen to be dominant so that it can know the priority of problem solving Pareto diagram function is to identify or select the main problem for quality improvement from the largest to the smallest. The use of the Pareto diagram is: a. Show the main problem, b. State the comparison of each problem to the whole, c. Show the level of improvement after corrective actions in a limited area, d. Show a comparison of each issue before and after improvement. Pareto diagrams are used to identify several important issues, to find the biggest and most influential defect. The most influential search for the biggest defect or defect can be useful to find some representatives of identified defects, then it can be used to create a causal diagram. This needs to be done considering it is very difficult to find the cause of all identified defects. If all defects are analyzed to find the cause then it will only waste time and money in vain.

17

Cause and Effect Diagram : The causal diagram is used to identify problems and find the source of the cause of quality problems, this diagram forms ways to make products better and achieve the results (results).

4. Discussion and Conclusion

9
This research was conducted by following the steps of applying the Six Sigma method, namely define, measure, analyze, improve and control which includes: Define : a. problem: PT. XYZ sets several specifications of quality standards printed on magazines, in order to meet customer needs and satisfaction. But from these specifications there are still many prints that have not met quality standards. There are 3 (three) causes of the most defects in the production of this magazine, namely opaque ink color, the center fold position does not register with a deviation tolerance of 0.275 mm and the newspaper sheet is cut off not fitting size, where the standard size of the machine cut-off is 56 x 75.3 mm b. Objective: In order to produce quality printed magazines and reduce product defects. Where the expected percentage of defects can be decreases close to 0%. So that consumers will be satisfied with the production of PT. XYZ. Measure : a. Determine Critical to Quality (CTQ), CTQ is the main attribute of consumer needs. CTQ can be interpreted as an element of the process / activity that has a direct effect on achieving the desired quality. In PT. X there are 3 types of defects, which are blurred ink colors, middle fold position not registers and newspaper sheets not cut according to size, b. performance baseline Baseline measurement is intended to determine the extent to which a product can meet the customer's specific needs, before the product is delivered to the customer.

Table 1. Frequency of Magazine Production Disability

Month	Amount Of Production	Number Of Production Defects	Percentage Of Defective Products
January	1780850	75500	4.23954853
February	1765350	80400	4.554337667
March	1750340	85500	4.884765246
April	1750325	78500	4.484881379
May	1725350	79500	4.607760744
June	1735320	83450	4.808911325
July	1690860	80320	4.750245437
August	1670900	80500	4.817762882
September	1680900	79650	4.738532929
October	1695350	86700	5.113988262
November	1730350	89900	5.195480683
December	1750500	89950	5.138531848
Total	20726395	989870	

Table 2. DPMO and Sigma Value

Month	Amount Of Production	Number Of Production Defects	CTQ	DPMO	Sigma
January	1780850	75500	3	14131.82843	3.693607249
February	1765350	80400	3	15181.12556	3.66533224
March	1750340	85500	3	16282.55082	3.63740455
April	1750325	78500	3	14949.6046	3.671423035
May	1725350	79500	3	15359.20248	3.6607015
June	1735320	83450	3	16029.70442	3.643669112
July	1690860	80320	3	15834.15146	3.648572508
August	1670900	80500	3	16059.20961	3.642933741
September	1680900	79650	3	15795.10976	3.649557673
October	1695350	86700	3	17046.62754	3.61896701
November	1730350	89900	3	17318.26894	3.612582266
December	1750500	89950	3	17128.43949	3.617034982
Total	20726395	989870	3	15919.63613	3.64642267

From the conversion results, DPMO shows that the sigma value of the production of this magazine is 3.6 The order of the number of defects per item / type of defect, namely as follows

Table 3. Data on types of defects

Month	Type Of Defects (exemplar)			Total Defects
	Blur	Not Registered	Cut Off	
January	49325	13215	12960	75500
February	45325	25315	9760	80400
March	51250	21750	12500	85500
April	51300	18500	8700	78500
May	51250	23500	4750	79500
June	49210	28700	5540	83450
July	47500	21300	11520	80320
August	40600	29800	10100	80500
September	49800	18700	11150	79650
October	51320	25300	10080	86700
November	45870	29700	14330	89900
December	49650	34750	5550	89950
Total	582400	290530	116940	989870

From the table above it can be seen that the largest random type sequence is defects Blur (59%), not registered (29%) and Cut Off (12%).

Then from the data on the type of defect, analysis is done using the pareto diagram and cause effects diagram, as follows :

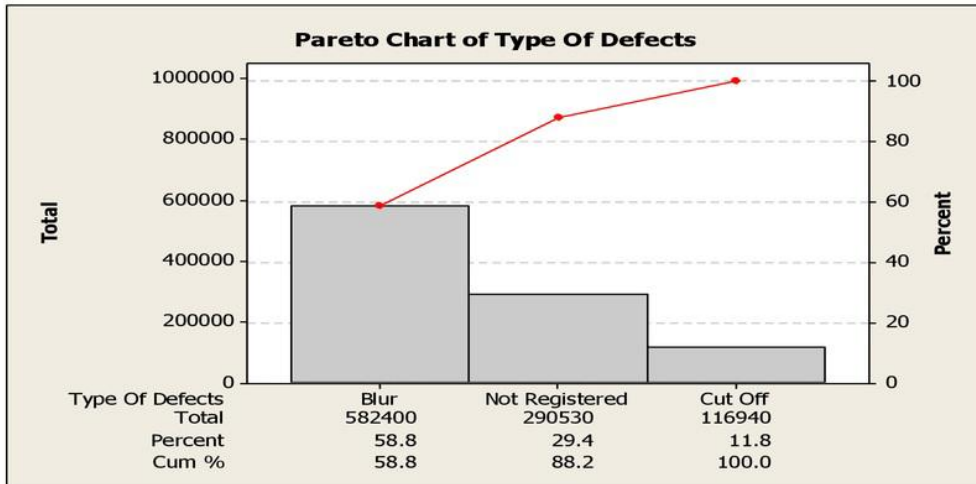


Fig.2 Pareto diagram analysis

Based on observation and analysis results, outline of a causal diagram can be made, stating the issue of the magazine.

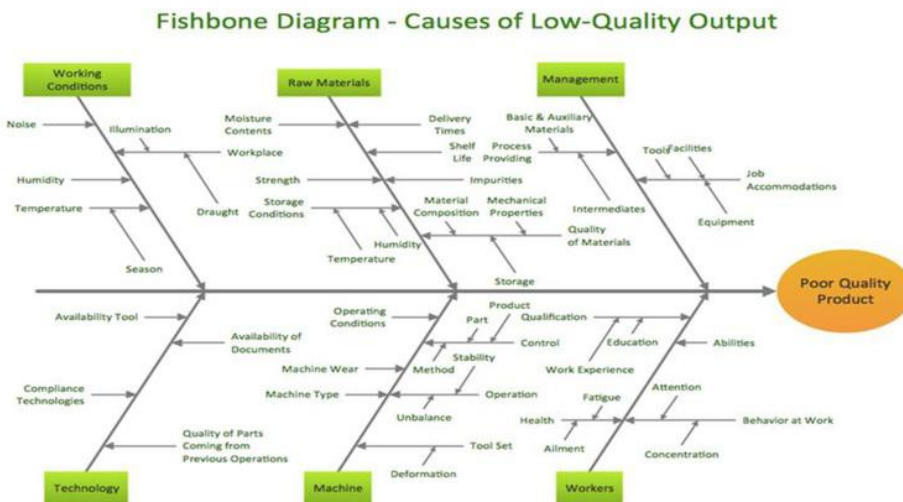


Fig.3 Causal Diagram Analysis

The conclusions obtained from this study are: The sigma level of PT.X is 3.6 with probable damage of 15919,63613 products in one million products produced. There are three types of defects in the production of magazine letters produced by PT.XYZ which is a blurry ink color, 582,400 (59%), not correct in the register of 290530 (29%) and newspaper cuttings of 116940 (12%). The main factor of the blurry ink color is the color setting of the engine that is less accurate, replenishing the ink volume on the color tank is not suitable for the quantity and the damage plate

5. Research Limitations and Recommendations for Future Studies

With regard to the research methodology and conditions, some research limitations are as follows:

- The results of this study are confined to the population of research sample and they are not generalizable to other organizations.
- Research findings are confined to the time duration of data collection.
- In this study, confirmed data are used in designing the questionnaires of intellectual capital and organizational commitment.
- In this study, only the dimensions of intellectual capital are considered.

Also, with regard to the mentioned limitations, Suggestions for Improving Production Quality: Some actions that can be taken to repair any blurry color defect types, no list and defective cuts, include:

- Engine dimensions: a. Check carefully the machine before use and after use B. Prepare frequently replaced spare parts, and perform regular maintenance.
- Human Resources: Improve the skills of employees by conducting training.
- Material: Checks raw materials received from suppliers according to the specifications used and separating materials that do not meet the standards.
- Method Method: Routine behavioral briefing to provide verbal and written instruction.
- Environmental element: Increase the facility in the production room to reduce the heat temperature due to engine and weather.

6. References

- [1] Kwak, Y. H., & Anbari, F. T. (2006). Benefits, obstacles, and future of six sigma approach. *Technovation*, 26(5-6), 708-715.
- [2] Linderman, K., Schroeder, R. G., Zaheer, S., & Choo, A. S. (2003). Six Sigma: a goal-theoretic perspective. *Journal of Operations management*, 21(2), 193-203.
- [3] Antony, J., & Banuelas, R. (2002). Key ingredients for the effective implementation of Six Sigma program. *Measuring business excellence*, 6(4), 20-27.
- [4] Antony, J. (2004). Six Sigma in the UK service organisations: results from a pilot survey. *Managerial Auditing Journal*, 19(8), 1006-1013.
- [5] Antony, J. (2006). Six sigma for service processes. *Business Process Management Journal*, 12(2), 234-248.

- [6] Schroeder, R. G., Linderman, K., Liedtke, C., & Choo, A. S. (2008). Six Sigma: Definition and underlying theory. *Journal of operations Management*, 26(4), 536-554.
- [7] Arnheiter, E. D., & Maleyeff, J. (2005). The integration of lean management and Six Sigma. *The TQM magazine*, 17(1), 5-18.
- [8] McAdam, R., & Lafferty, B. (2004). A multilevel case study critique of six sigma: statistical control or strategic change?. *International Journal of Operations & Production Management*, 24(5), 530-549.
- [9] Saraph, J. V., Benson, P. G., & Schroeder, R. G. (1989). An instrument for measuring the critical factors of quality management. *Decision sciences*, 20(4), 810-829.
- [10] Linderman, K., Schroeder, R. G., & Choo, A. S. (2006). Six Sigma: The role of goals in improvement teams. *Journal of operations Management*, 24(6), 779-790.
- [11] Zu, X., Fredendall, L. D., & Douglas, T. J. (2008). The evolving theory of quality management: the role of Six Sigma. *Journal of operations Management*, 26(5), 630-650.
- [12] Akao, Y., & Mazur, G. H. (2003). The leading edge in QFD: past, present and future. *International Journal of Quality & Reliability Management*, 20(1), 20-35.
- [13] Goh, T. N. (2002). A strategic assessment of Six Sigma. *Quality and Reliability Engineering International*, 18(5), 403-410.
- [14] Antony, J., Jiju Antony, F., Kumar, M., & Rae Cho, B. (2007). Six sigma in service organisations: Benefits, challenges and difficulties, common myths, empirical observations and success factors. *International journal of quality & reliability management*, 24(3), 294-311.
- [15] Näslund, D. (2008). Lean, six sigma and lean sigma: fads or real process improvement methods?. *Business process management journal*, 14(3), 269-287.
- [16] Klefsjö, B., Wiklund, H., & Edgeman, R. L. (2001). Six sigma seen as a methodology for total quality management. *Measuring business excellence*, 5(1), 31-35.
- [17] Christopher, M., & Lee, H. (2004). Mitigating supply chain risk through improved confidence. *International journal of physical distribution & logistics management*, 34(5), 388-396.
- [18] Ranjan Senapati, N. (2004). Six Sigma: myths and realities. *International Journal of Quality & Reliability Management*, 21(6), 683-690.
- [19] Nelson, L. S. (1984). The Shewhart control chart—tests for special causes. *Journal of quality technology*, 16(4), 237-239.
- [20] Allen, T. T. (2006). *Introduction to engineering statistics and six sigma: statistical quality control and design of experiments and systems*. Springer Science & Business Media.

- [21] ³ Chakrabarty, A., & Chuan Tan, K. (2007). The current state of six sigma application in services. *Managing Service Quality: An International Journal*, 17(2), 194-208.
- [22] ⁵ Antony, J., & Fergusson, C. (2004). Six Sigma in the software industry: results from a pilot study. *Managerial Auditing Journal*, 19(8), 1025-1032.
- [23] ¹⁰ Chiarini, A. (2011). Japanese total quality control, TQM, Deming's system of profound knowledge, BPR, Lean and Six Sigma: Comparison and discussion. *International Journal of Lean Six Sigma*, 2(4), 332-355.
- [24] ⁶ Henderson, K. M., & Evans, J. R. (2000). Successful implementation of Six Sigma: benchmarking general electric company. *Benchmarking: An International Journal*, 7(4), 260-282.
- [25] ⁴ Salah, S., Rahim, A., & Carretero, J. A. (2010). The integration of Six Sigma and lean management. *International Journal of Lean Six Sigma*, 1(3), 249-274.

Improvement Of Magazine Production Quality Using Six Sigma Method : Case Study Of a PT.XYZ

ORIGINALITY REPORT

17 %	17 %	14 %	%
SIMILARITY INDEX	INTERNET SOURCES	PUBLICATIONS	STUDENT PAPERS

PRIMARY SOURCES

1	collections.plymouth.ac.uk Internet Source	2 %
2	etds.lib.ncku.edu.tw Internet Source	2 %
3	www.growingscience.com Internet Source	2 %
4	ir.dut.ac.za Internet Source	1 %
5	baadalsg.inflibnet.ac.in Internet Source	1 %
6	etd.lib.nsysu.edu.tw Internet Source	1 %
7	core.ac.uk Internet Source	1 %
8	www.pomsmeetings.org Internet Source	1 %
9	publicacoes.apq.pt	

Internet Source

1%

10

Andrea Chiarini. "From Total Quality Control to Lean Six Sigma", Springer Nature America, Inc, 2012

Publication

1%

11

hal.archives-ouvertes.fr

Internet Source

1%

12

www.scribd.com

Internet Source

1%

13

www.ccsenet.org

Internet Source

1%

14

www.cluteinstitute.com

Internet Source

1%

15

www.inderscience.com

Internet Source

1%

16

International Journal of Lean Six Sigma, Volume 1, Issue 4 (2012-08-06)

Publication

<1%

17

iieom.org

Internet Source

<1%

18

epdf.tips

Internet Source

<1%

19

fedetd.mis.nsysu.edu.tw

Internet Source

<1%

20

epubl.itu.se

Internet Source

<1%

21

Nurul Fadly Habidin, Sha'ri Mohd Yusof.
"Critical success factors of Lean Six Sigma for
the Malaysian automotive industry",
International Journal of Lean Six Sigma, 2013

Publication

<1%

Exclude quotes Off

Exclude matches Off

Exclude bibliography Off